

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



Chip type, Ultra High Temperature Series




- High temperature range, for 150°C use
- Complied to the RoHS directive

Item	Characteristics								
Operating temperature range	-55 ~ +150°C								
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	25	35	50	63				
	$\tan\delta$	0.14	0.12	0.1	0.08				
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25°C) / Z(+20°C) \leq 1.5$ $Z(-55°C) / Z(+20°C) \leq 2.0$								
Load life	After an application of DC bias voltage plus the rated AC ripple current for 1000 hours at 150°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Capacitance change	Within $\pm 30\%$ of initial value							
	$\tan\delta$	Less than 200% of the specified value							
	ESR	Less than 200% of the specified value							
	Leakage current	Less than specified value							
Shelf life(at 150°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 10\%$ of initial value							
	$\tan\delta$	Less than specified value							

DRAWING

Unit : mm

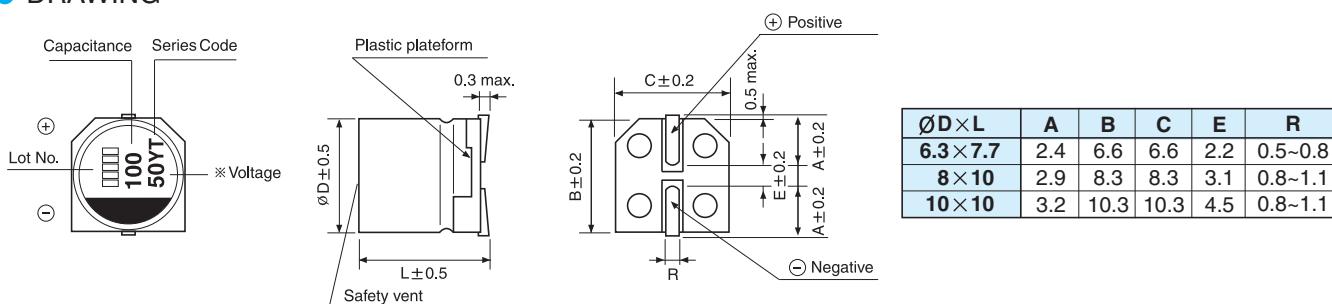

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	25			35			50			63		
15											6.3×7.7	80	410
22								6.3×7.7	80	410			
33											8×10	40	610
47				6.3×7.7	60	510							
56								8×10	35	660	10×10	30	710
68	6.3×7.7	45	540										
100				8×10	30	710	10×10	28	780				
150	8×10	27	740	10×10	23	830							
270	10×10	22	850										

Ripple current (mA rms) at 150°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size $\varnothing D \times L$ (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00